Integrated Solutions

intercept SPACER SYSTEM

Product Information

Intercept® ULTRA Intercept Thinplate Simulation Model

For More Information, Please Contact Your GED Sales Manager

GED Integrated Solutions
9280 Dutton Drive
Twinsburg, OH 44087-1967

Phone: 330-963-5401
Fax: 330-425-8741
www.gedusa.com

For THERM

- ULTRA and Thinplate spacer wall thickness = 0.195mm
- Thermal conductivity

  ULTRA or ULTRA ***Blackline*** = 13.63 W/m·K

  Thinplate or Thinplate ***Blackline*** = 50 W/m·K

  Desiccant = 0.29 w/m·K
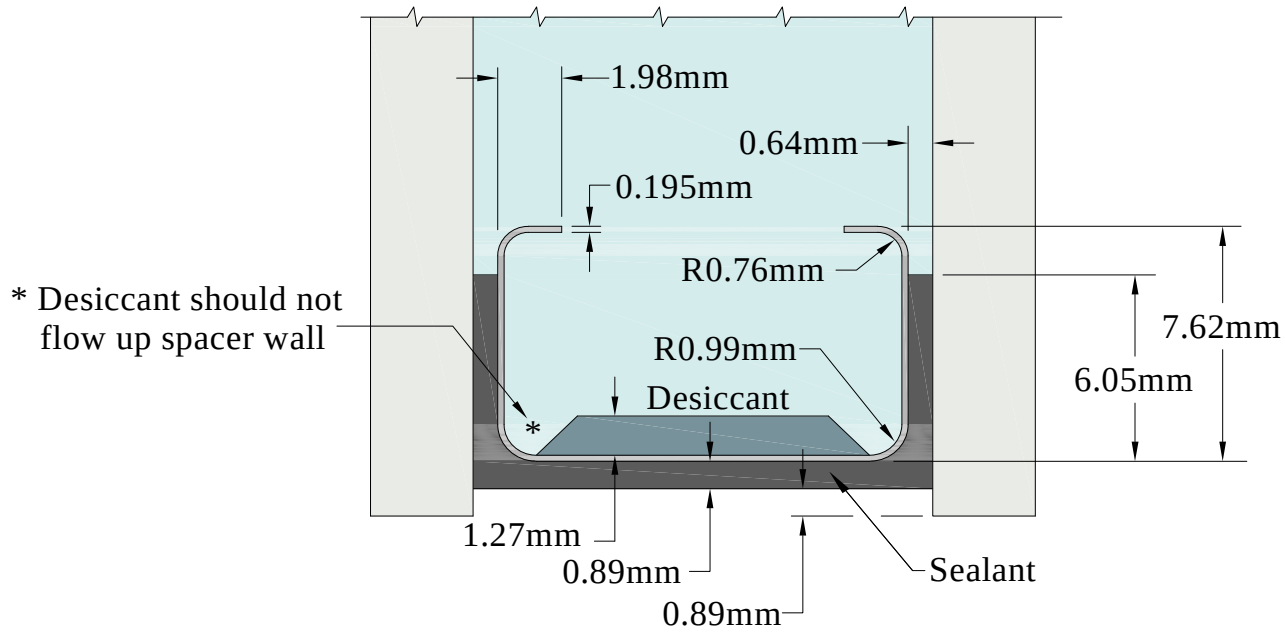
  Sealant = 0.24 W/m·K
- Spacer should be below sash line