



TECHNICAL SPECIFICATIONS SHEET

FOR THERM	
Spacer Wall Thickness	ThinPlate material = 0.0077"
Thermal Conductivity	ThinPlate material = 50 W/mK
	Desiccant = 0.29 W/mK
	Sealant = 0.24 W/mK
Spacer should be below sight line	
All dimensions in millimeters	

ACCURATE GEOMETRY

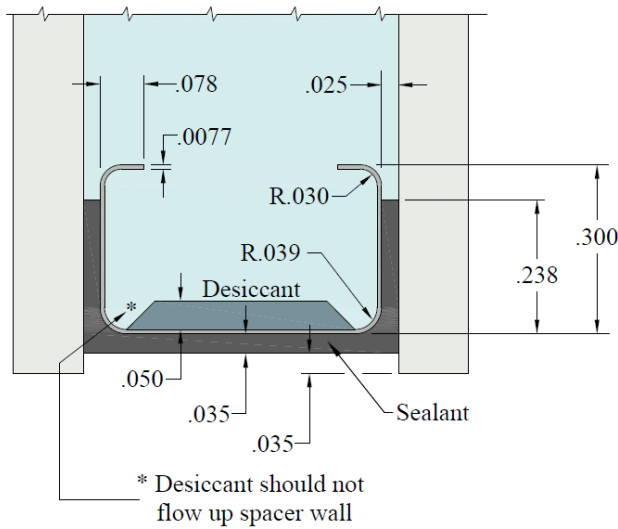

INACCURATE GEOMETRY

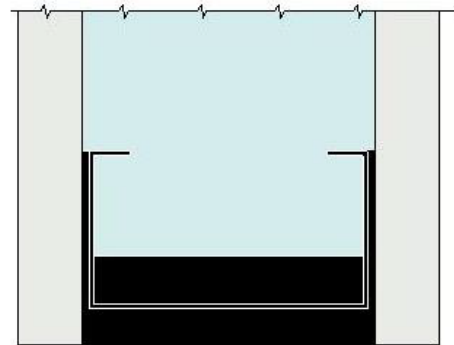

For more information, please contact our Sales Team at 330-963-5401.

For GED certified replacement parts & components, visit store.gedusa.com.


GED Integrated Solutions
 31100 Diamond Pkwy, Glenwillow, OH 44139
 P: 330-963-5401 | www.gedusa.com

Lit# InterceptMaterialSimModEU-20221114
 Intercept is a registered trademark owned by Vitro.


TECHNICAL SPECIFICATIONS SHEET

FOR THERM	
Spacer Wall Thickness	ThinPlate material = 0.0077"
Thermal Conductivity	ThinPlate material = 50 W/mK
	Desiccant = 0.29 W/mK
	Sealant = 0.24 W/mK
Spacer should be below sight line	
All dimensions in millimeters	

ACCURATE GEOMETRY

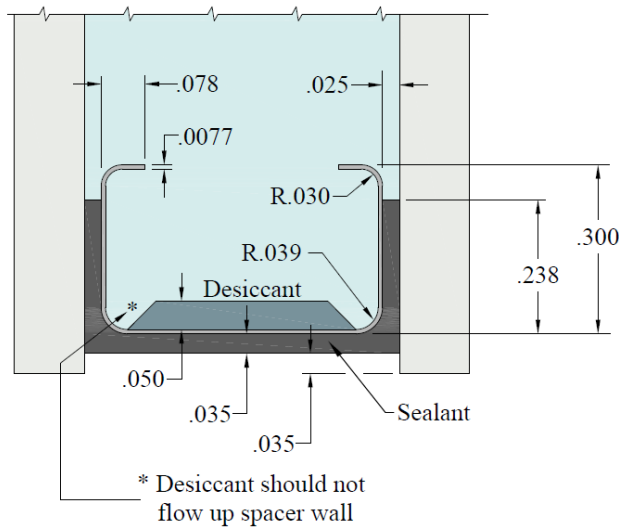

INACCURATE GEOMETRY

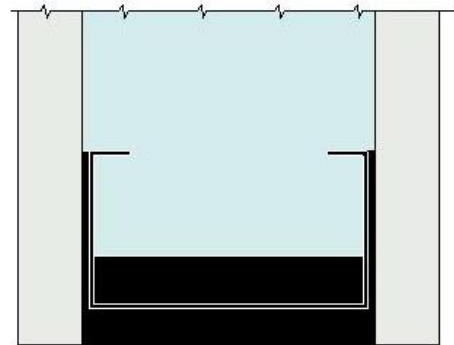

For more information, please contact our Sales Team at 330-963-5401.

For GED certified replacement parts & components, visit store.gedusa.com.


GED Integrated Solutions
31100 Diamond Pkwy, Glenwillow, OH 44139
P: 330-963-5401 | www.gedusa.com

Lit# InterceptMaterialSimModEU-20221114
Intercept is a registered trademark owned by Vitro.


TECHNICAL SPECIFICATIONS SHEET

FOR THERM	
Spacer Wall Thickness	ULTRA BlackLine material = 0.0077"
Thermal Conductivity	ULTRA material = 13.63 W/mK
	Desiccant = 0.29 W/mK
	Sealant = 0.24 W/mK
Spacer should be below sight line	
All dimensions in millimeters	

ACCURATE GEOMETRY

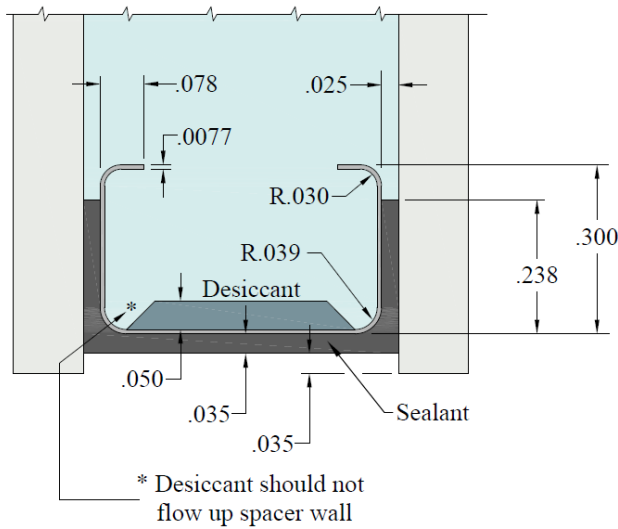

INACCURATE GEOMETRY

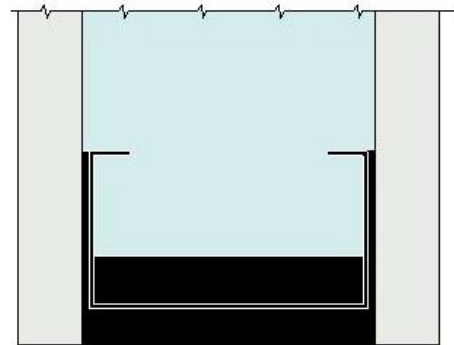

For more information, please contact our Sales Team at 330-963-5401.

For GED certified replacement parts & components, visit store.gedusa.com.


GED Integrated Solutions
31100 Diamond Pkwy, Glenwillow, OH 44139
P: 330-963-5401 | www.gedusa.com

Lit# InterceptMaterialSimModEU-20221114
Intercept is a registered trademark owned by Vitro.


TECHNICAL SPECIFICATIONS SHEET

FOR THERM	
Spacer Wall Thickness	ULTRA material = 0.0077"
Thermal Conductivity	ULTRA material = 13.63 W/mK
	Desiccant = 0.29 W/mK
	Sealant = 0.24 W/mK
Spacer should be below sight line	
All dimensions in millimeters	

ACCURATE GEOMETRY

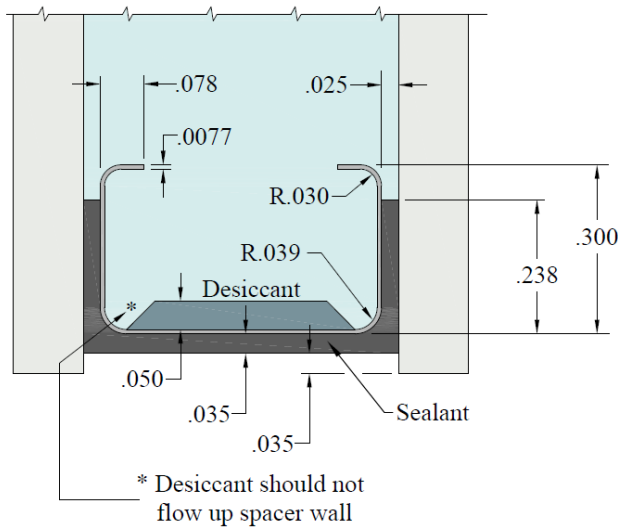

INACCURATE GEOMETRY

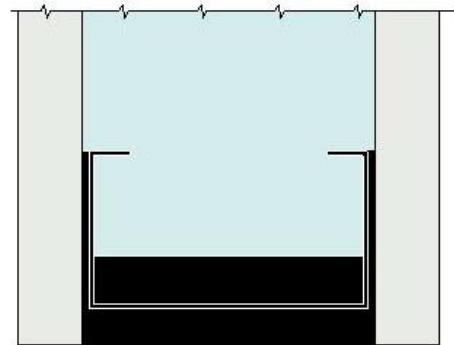

For more information, please contact our Sales Team at 330-963-5401.

For GED certified replacement parts & components, visit store.gedusa.com.

GED Integrated Solutions
31100 Diamond Pkwy, Glenwillow, OH 44139
P: 330-963-5401 | www.gedusa.com

Lit# InterceptMaterialSimModEU-20221114
Intercept is a registered trademark owned by Vitro.